


Electric portable Glass Lifter

For roof and front glazings (*)

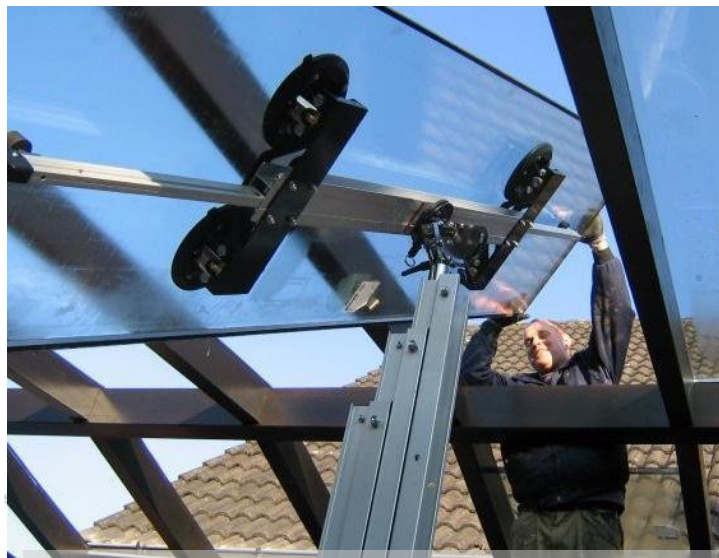


« Fitting glass panels at a height or large face panes has never been easier »

The Portable Glass Lifts are made up of two distinct elements.

Lifting machine with electric motor

- No need to use any tools for the operation
- It takes only 30 seconds to complete machine set-up.
- Telescoping masts up to a capacity of 65 kg (GLS 340 and GLS 520)
- Sliding rails for the capacity of 120 kg (CA 400 GL)
- The overall stability is ensured by 4 feet equipped with locking wheels, for use also on sloping ground
- A level ensures the proper set-up while adjusting the feet
- Equipped with handle and **transport wheels** to move easily on site (GLS 520 and CA 400 GL)
- Can be transported by van or estate car
- The electric lifting motor is 110 V or 220 V
- Electric remote control with **variable speed** switch.
- Manual operation is possible in case of power failure
- Automatic **Overload breaker**: the lifts are equipped to prevent over weight loading
- **Emergency stop button**: Pressing this button stops raising or lowering immediately

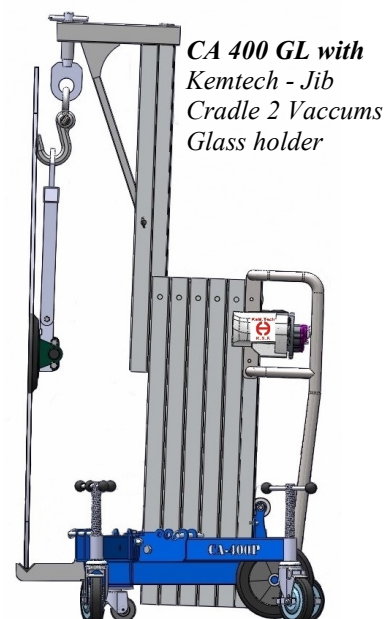

Cradle with vacuums

- Safety suction pump, diameter 200 mm (certified TÜV and GS) unit capacity 65 kg
A red line on the pump's plunger serves as a vacuum indicator
- Designed for horizontal or vertical lifting (angle adjustment up to 90° for the CA 400 GL)
- GLS 340 and GLS 520 with 2 vacuums, CA 400 GL with 4 vacuums and outriggers for glass up to 4 m

Model KSF	Load capacity with an angle of 80°	Lifting Height (**)	Dimensions store	Dimensions operating	Lift weight	Cradle
GLS 340	65 kg / 3,4 m	3,4 m	300 x 300 mm	1000 x 1000 mm	24 kg	15 kg
GLS 520	65 kg / 3,7 m	5 m	380 x 380 mm	1500 x 1500 mm	38 kg	
CA 400 GL	120 kg / 4,2 m	4,2 m	540 x 500 mm	980 x 1010 mm 1480 x 760 mm (***)	66 kg	20 kg

(*) = depending on the model

(**) = cradle horizontal

(***) = front glazing

Electric portable Glass Lifter

Features



CA 400 GL
With cradle for vertical lifting
and 2 outriggers for glass up to 4 m




Handle and transport wheels
(GLS 520
CA 400 GL)



Cradle CA 400 GL



Accessories




Motor cover
Included with CA 400
Protection for dusty atmosphere



Platform
turns to 360°. With
screw for multi-




Platform outrigger
Lenght 2 x 380 mm



Glass holder CA 400
To carry or support
The glass



Kemtech Jib Crane
For CA 400
With load hook
Span 400 mm



Glass cradle CA 400
Capacity 100 kg
(use with the jib)

CA 400 GL

Two individually adjustable feet for :

- Use in front of Vertical lift

According to the load 2 counter weight (included) are needed. Each leg has a height-adjustable. Wheel brake to fit almost any configuration site.



www.kemtech-ksf.com